

Tile-In Aluminium Profile for 6 × 12 mm IP67 Neon Flex

Straight tile-in mounting channel for compatible 24V and 48V Neon Flex – available in 1 metre and 2 metre lengths.

SPECIFICATION

Product type	Tile-in aluminium profile
Profile form	Straight and rigid
Length options	1 metre / 2 metres
Compatible Neon Flex	6 × 12 mm IP67
Compatible voltage	24V and 48V
Overall section	30.70 mm W × 13.20 mm H
Channel opening	6.70 mm
Internal depth	11.20 mm
Wall / base	2.00 mm / 2.00 mm
Flange	20.00 mm projection; 1.50 mm thick
Material	Aluminium
Warranty	7 Years
Supplied	Aluminium profile only

Important

Neon Flex, diffuser, fixings and accessories are not included. IP67 refers to the compatible Neon Flex, not the bare aluminium channel or completed installation.




PRODUCT OVERVIEW

Create a neat, flush linear-lighting detail in tiled floors or walls. The asymmetric perforated flange sits beneath the finish so suitable tile adhesive or bedding material can key around the profile while the channel remains aligned with the finished surface.

The channel is selected for UK LED Lights 6 × 12 mm IP67 Neon Flex in both 24V and 48V. Use suitable sealing, drainage, fixings and substrate preparation for the installation environment.

Check product dimensions before ordering if the profile will be used with another manufacturer's Neon Flex. Nominal 6 × 12 mm products can vary between ranges.

DIMENSIONS

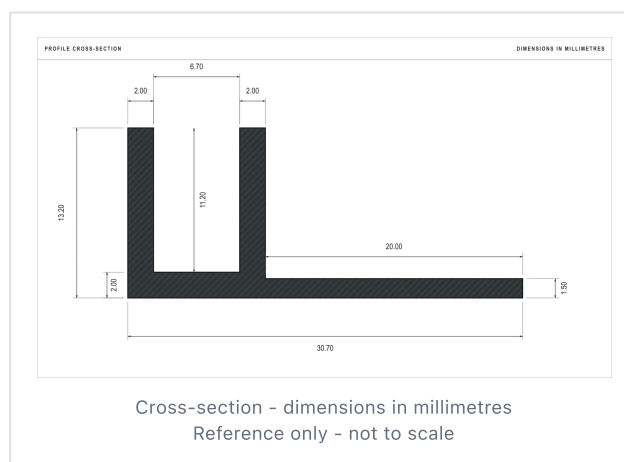

Need help checking compatibility or planning a tiled lighting detail? Contact the UK LED Lights technical team on 01952 370008 or email sales@ukledlights.co.uk.